
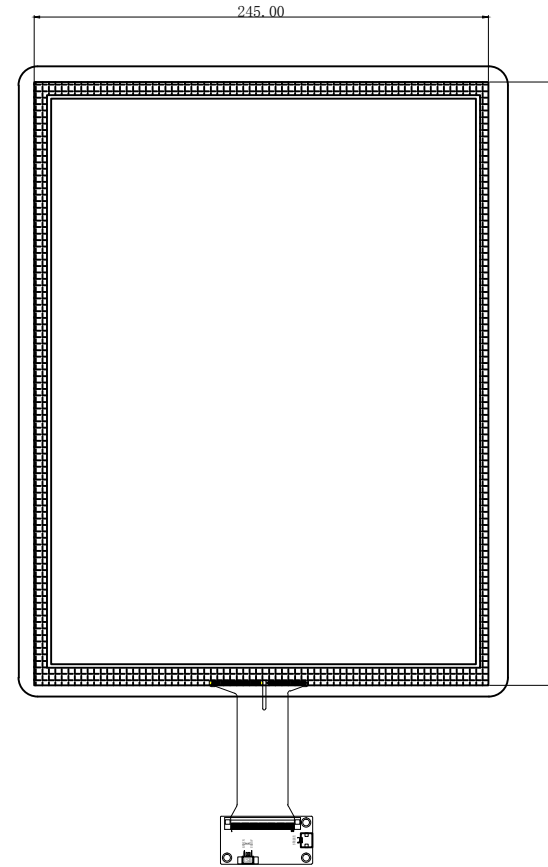
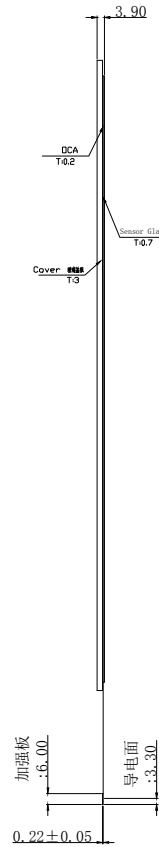


客户确认:

序号	更改记录	记录人	日期
A			
B			

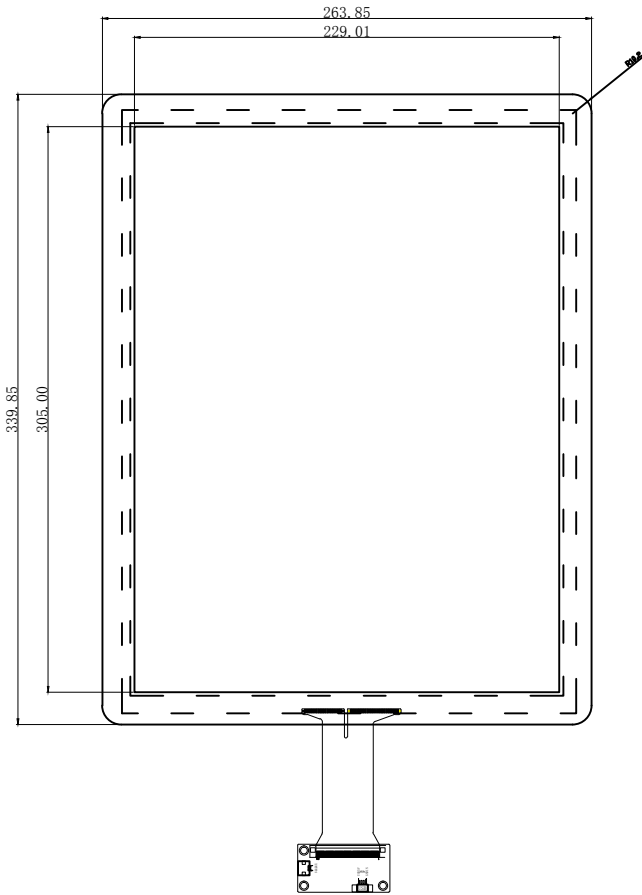

Front view

Side view

Back view

Technical Parameters:
 1. Cover G+ITO GLASS+Adhesive+FPC
 ITO GLASS: 0.7mm
 Cover glass: 3.0mm
 Adhesive: 0.2mm
 Lead wire: FPC (PINCH=0.22mm)
 Total thickness: 3.9±0.1mm
 SENSOR process: silk screen
 2. Working voltage: USB 5V
 3. Light transmittance: 87%
 4. Surface hardness: 6H
 5. Working environment: -20 ~ +70 , 90%RH
 6. Storage environment: -30 ~ +80 , 90%RH
 7. Unmarked size tolerance is ±0.2mm

配置型号:

1	ITO GLASS	LC-15112GNP
2	GLASS	
3	驱动程序	驱动程序编号: 1327403378

TOT150UCA009(TTS150L1C001)

DRAWN BY: 绘图: zhang s l	TITLE: 产品编号:	VIEW:
CHECKED BY: 审核:	CUSTOMER ID: 客户编号: XXX	
APPROVED BY: 批准:	VERSION NUMBER: 版本号: A	UNITS 单位: mm
Standard tolerance: 公差:	DATE: 日期:	SCALE 比例: 1:1