

Top One Tech LIMITED (HK)

21.5" LCD Open Frame PCAP Multi-Touch Monitor

(PCAP and Zero-bezel Type)

Model: TOT215UCA001

Part number:TOT215K1C001



Top One Tech's 21.5" open frame LCD touch monitors have a long-lasting product cycle because the enclosure is controlled by Top One Tech's specifications. Future panel improvements are therefore possible without external changes. The TOT215UCA001 integrate with the Top One Tech's PCAP technology touchscreen.

Features

- Bezel seal standard: Zero-bezel, True flat
- Long lasting product cycle-enclosure controlled by Top One Tech specifications
- Future generation panels phased-in without external changes
- High quality panel with high brightness, high contrast ratio and broad viewing angle
- Multiple mounting options including VESA mount, horizontal or vertical bracket-mount
- Compact and slim profile for easy integration from side, top and bottom
- Top One Tech's PCAP technology on pure glass for the ultimate in image quality
- Finger or gloved hand operation
- USB/Serial touch interface port
- VGA/DVI/HDMI input video format
- Worldwide agency approvals


Specification

Model No.	TOT215UCA001	
Touch screen Type	Projected Capacitive touch sensor, 10 points in win7	
Bezel Color	Black	
Diagonal Size	21.5" diagonal	
Aspect Ratio	16:9	
Dimensions	20.3 " × 12.2 " × 1.5 " (516mm×311mm×38.5mm)max	
Active Display Area	18.77" × 10.56" (476.64mm×268.11mm)	
Suggested Resolution	1920×1080@60Hz	
LCD Technology	Active matrix TFT LCD with LED backlighting	
Support Colors	16.7M	
Brightness(Typ.)	LCD Panel: 250 nits ; With PCAP:215 nits	
Response Time(Typ.)	5ms	
Viewing Angle (Typ.at CR> 10)	Horizontal(left/right)	89°/89°
	Vertical(up/down)	89°/89°
Contrast Ratio(Typ.)	1000:1	

Video Input	VGA ,DVI,HDMI
Power Supply	Type: External brick Input (line) voltage: 100-240 VAC, 50-60 Hz
Environment	Operating Temp. 0~50°C
	Storage Temp. -10~60°C
	Operating RH: 20%~80%
	Storage RH: 10%~90%
MTBF	30,000 Hours demonstrated
Weight (Approx.)	Unpackaged: 4.8kg; Packaged: 6.9kg
Mount Options:	VESA 4-hole 100mm mounting interface on rear of unit 2-hole mounting interface on all 4 sides
On-Screen Display (OSD)	Accessible through switches on the unit's tethered OSD Control box. Controls :Menu,Up,Down,Select;Settings:Brightness,Contrast,Clock,Phase,H-position,V-position, Auto-Adjust, Aspect Ratio, Sharpness, Color Temperature, OSD Timeout, OSD Language, OSD H-Position, OSD;V-Position, Recall Defaults, Video Source;Languages:English,French,Italian,German,Spanish,Simplified Chinese, Traditional Chinese, Japanese; Lockouts: OSD, Power
Agency Approval	CCC,ETL,FCC,CE,RoHS
Regular Warranty	1 year

NOTE:The display SPEC. will change follow the relevant LCD panel brand and model

Mechanical Dimensions

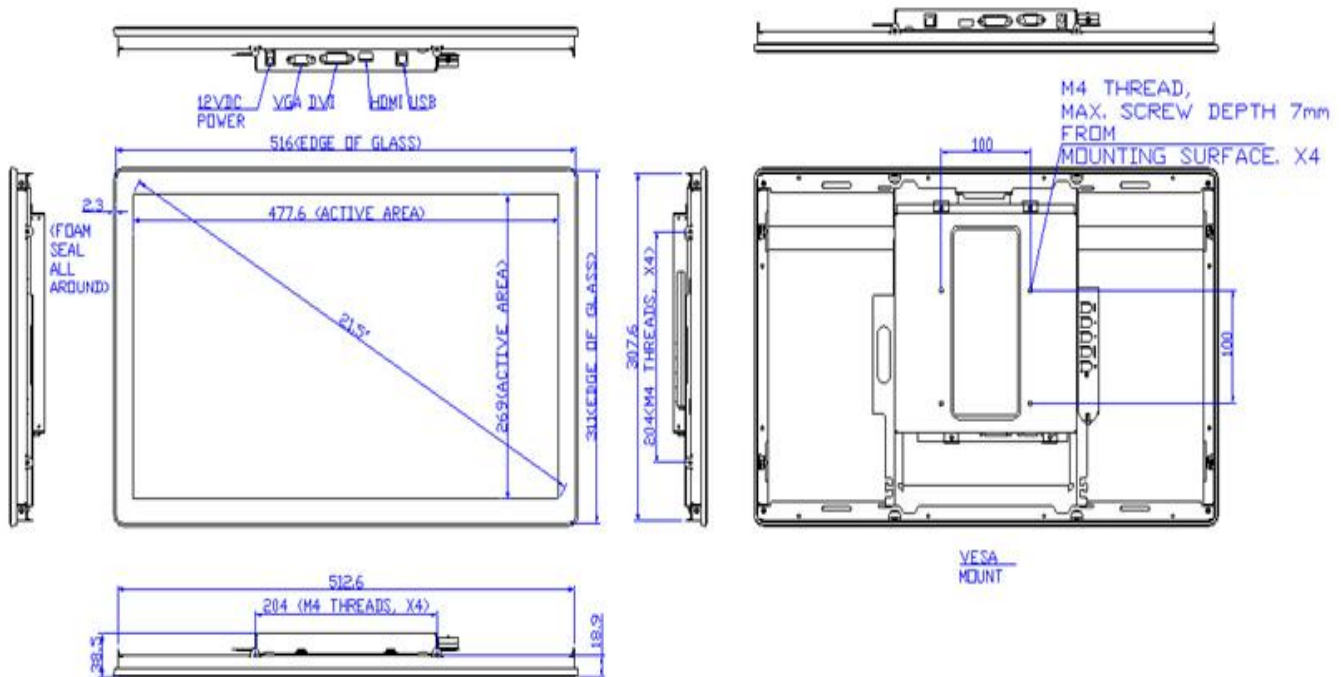

Accessories

Power Cable: A North American power cable or an European power cable is included according to the end user's area.

Power Supply Brick: A power supply brick is included.

Touch/Video/DVI Cables: Detachable serial or USB touch cable , video cable and DVI cable are included

L-brackets: Four standard L-brackets are included(optional by different size).

Typical Application

Information Kiosk

Banking ATM

Casino Gaming machine

Industrial Control

Transportation

Education and Training

How to contact us

TOP ONE TECH LIMITED

Mobile Phone : (+86)13631610695

Tel: 0086-0755-21070641

Whatsapp/Wechat :+8613631610695

Email : sales@toponetech.cn

Skype : elsieyu-sz@hotmail.com

Office in China : Room 512 & 517, Taiyangneng Guigu Building Zhongxing Xiaoqu, Yunfeng Road No.3 Gaofeng shequ, Longhua District, Shenzhen, China

Facilities in China : No. 2, Guihua Jiayi Industrial district, Guanlan, Longhua, Shenzhen, China 51804