



1	2	3	4	5	6	7	8	
客户确认:			序号	更改记录			记录人	日期
			A					
			B					

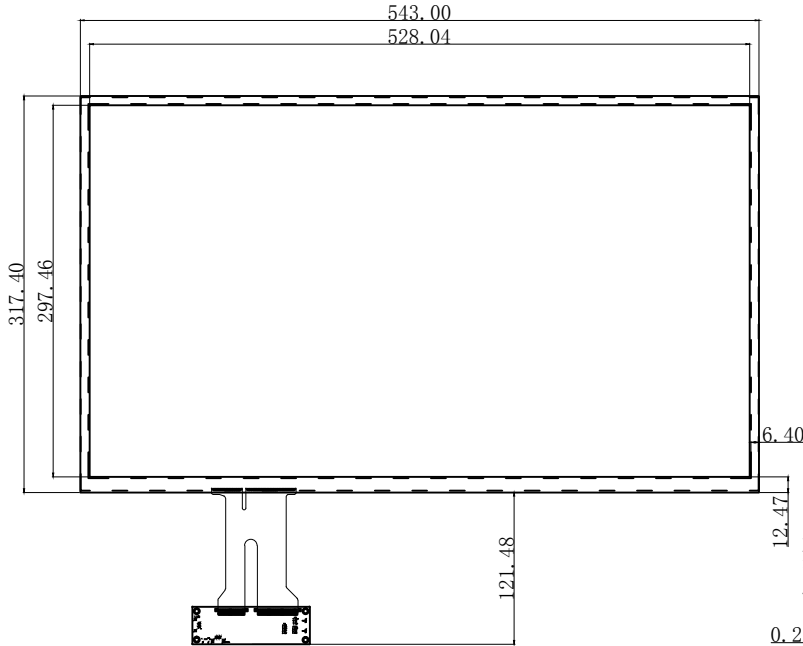

正视图
Front view

侧视图
Side view

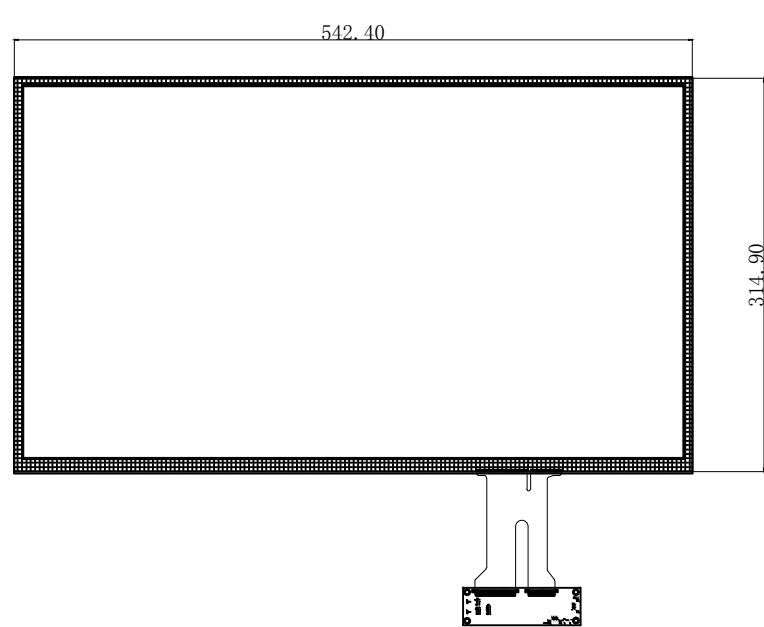

背视图
Back view

Technical Parameters:

- Cover: G+ITO GLASS+Adhesive+FPC
ITO GLASS: 1.1mm Cover glass: 1.1mm
Adhesive: 0.2mm
Lead wire: FPC (PINCH=0.22mm)
Total thickness: 2.4±0.1mm
SENSOR process: silk screen
- Working voltage: USB 5V
- Light transmittance: 87%
- Surface hardness: 6H
- Working environment: -20 ~ +70, 90%RH
- Storage environment: -30 ~ +80, 90%RH
- Unmarked size tolerance is ±0.2mm

1	GLASS	
2	ITO GLASS	1.1MM 238GB05
3	驱动程序	驱动程序: TTS238L1C002

DRAWN BY: 绘图: zhang s l	TITLE: 产品编号: TTS238L1C002	VIEW: 投影方式:
CHECKED BY: 审核:	CUSTOMER ID: 客户编号: XXX	
APPROVED BY: 批准:	VERSION NUMBER: 版本号: A	UNITS 单位: mm
Standard tolerance: 公差:	DATE: 日期:	SCALE 比例: 1:1