
TOP ONE TECH LIMITED
32" LCD Open frame PCAP Touch Monitor
(The Dust-proof,PCAP ,LED backlight)

Model: TOT320UCA001

Part number:TOT320K1C001



Top One Tech's 32" open frame LCD touch monitors have a long-lasting product cycle because the enclosure is controlled by Top One Tech's specifications. Future panel improvements are therefore possible without external changes. The TOT320UCA001 integrate with the Top One Tech's PCAP technology touchscreen.

Features

- Waterproof projected capacitive sensor allows wet finger operation, provides high quality touch experience even in harsh environment.
- Bezel seal standard:NEMA3 and IEC IP65
- Long lasting product cycle-enclosure controlled by Top One Tech specifications
- Future generation panels phased-in without external changes
- Multiple mounting options including VESA mount, horizontal or vertical bracket-mount
- Compact and slim profile for easy integration from side, top and bottom
- Finger or gloved hand operation
- USB touch interface port
- VGA/DVI/HDMI input video format
- Worldwide agency approvals

Specification


Model No.	TOT320UCA001	
Series	OT,Flat,Zero-bezel	
Display Type	16:9 Ratio 32 " a-Si TFT-LCD,LED backlight	
Active Area(display)	700.6*395.1(mm)	
Monitor Dimensions	Width: 783.6 mm Height: 473.5mm Depth: 55.2mm	
Suggested Resolution	1920×1080 @ 60Hz	
Support Colors	16.7M	
Brightness(Typ.)	Pure LCD Panel	280cd/m2
	With PCAP Glass Sensor	238cd/m2
Response Time(Typ.)	8ms	
Viewing Angle (Typ.at CR>10)	Horizontal(left/right)	89°/89°
	Vertical(up/down)	89°/89°
Contrast Ratio(Typ.)	1000:1	
Video Input	VGA ,DVI,HDMI	
Frequency (H/V)	30~80KHz / 60~75Hz	
Power Supply	Type: External brick	

	Display voltage: DC12V/5A Input (line) voltage: 100-240 VAC, 50-60 Hz	
Environment	Operating Temp:	0~50°C
	Storage Temp:	-20~60°C
	Operating RH:	20%~80%
	Storage RH:	10%~90%
MTBF	≥30,000 Hours	
LCD Back light Life(Typ.)	≥30,000 Hours	
Weight (Approx. N.W /G.W)	10.2Kg (1pcs in one package);	
Package Dimension	851*153*553(mm)	
Power Consumption	40W /2W (Standby)	
Mount Interface	1)VESA400*400mm 2)Mount bracket, horizontal or vertical (Standard mount brackets are supplied)	
OSD Control	Buttons	AUTO,+,POWER,-,MENU
	Function	Brightness, Contrast Ratio, Auto-adjust, Phase, Clock, H/V Location, Languages, Function, Reset
Touch screen Type	TopOneTech 32" Projected Capacitive touch sensor,4.3mm thickness	
Touch System Interface	Having USB interface	
Touch Response time	USB: <14ms	
Agency Approval	CCC, FCC, CE	

NOTE: The display SPEC. will change follow the relevant LCD panel brand and model



Mechanical Dimensions

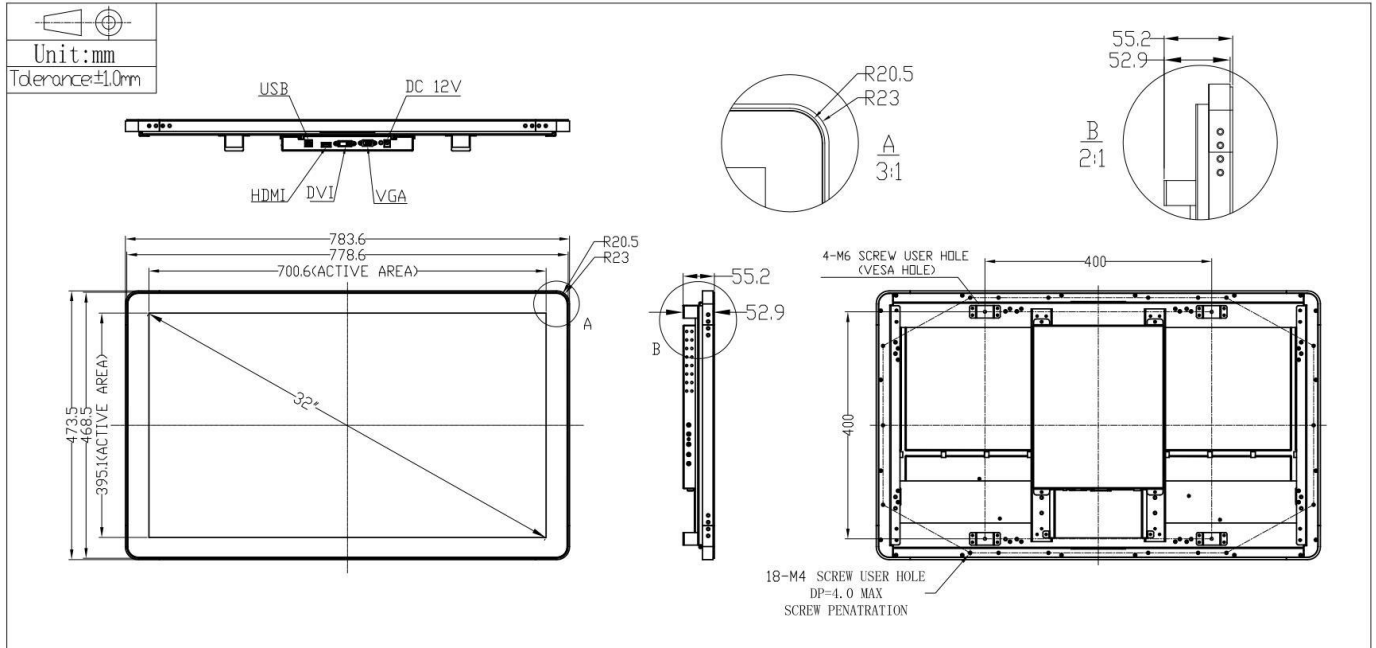

Accessories

Power Cable: A North American power cable or an European power cable is included according to the end user's area.

Power Supply Brick: A power supply brick is included.


Touch/Video/DVI Cables: Detachable serial or USB touch cable, video cable or DVI cable are included

L-brackets: Four standard L-brackets are included (option by different model)

Typical Application

Gaming/Casino Systems Outdoor

and indoor Kiosks Entertainment
Transport and Ticketing Hospitality
Banking
Customized Solution

 ***How to contact us***

TOP ONE TECH LIMITED

Mobile Phone : (+86)13631610695

Tel: 0086-0755-21070641

Whatsapp/Wechat :+8613631610695

Email : sales@toponetech.cn

Skype : elsieyu-sz@hotmail.com

Office in China : Room 512 & 517, Taiyangneng Guigu Building Zhongxing Xiaoqu, Yunfeng Road
No.3 Gaofeng shequ, Longhua District, Shenzhen, China

Facilities in China : No. 2, Guihua Jiayi Industrial district, Guanlan, Longhua, Shenzhen, China 51804